



5W4, 5W4-GT/G

5W4
5W4-GT/G

FULL-WAVE HIGH-VACUUM RECTIFIER

Filament Voltage	Coated		a-c volts
Current	5.0		amp.
	1.5		
	5W4	5W4-GT/G	
Maximum Overall Length	3-1/4"	3-3/8"	
Maximum Seated Height	2-11/16"	2-13/16"	
Maximum Diameter	1-5/16"	1-5/16"	
Bulb	Metal Shell, MT-8	T-9	
Base	{ Small Wafer	{ Intermed. Sh.	
	Octal 5-Pin	Octal 5-Pin	
Basing Designation	5T	G-5T	
Pin 1 { 5W4, Shell		Pin 4 - Plate #2	
Pin 1 { 5W4-GT/G, No Con.		Pin 6 - Plate #1	
Pin 2 - Filament		Pin 8 - Filament	
Mounting Position		Vertical	

BOTTOM VIEW

Maximum Ratings Are Design-Center Values

FULL-WAVE RECTIFIER

Peak Inverse Plate Voltage	1400 max. volts
Peak Plate Current per Plate	300 max. ma.

D-C Output Current:

With condenser input to filter	100 max. ma.
With choke input to filter	100* max. ma.

Typical Operation:


	Condenser- Input Filter	Choke- Input Filter
A-C Plate-to-Plate Supply Voltage (RMS)	700	1000 volts
Filter Input Condenser	4	- μ f
Min. Total Effect. Plate Supply Imped. per Plate	50	- ohms
Filter Input Choke	-	6 henries
D-C Output Current	100	100 ma.
D-C Voltage (At input to filter):*		
At half-load current (50 ma.)	410	420 volts
At full-load current (100 ma.)	360	405 volts
Difference (Voltage Regulation)	50	15 volts
Percentage Regulation	12	3.5 %

◇ Horizontal operation of the 5W4 permitted if pins 2 and 8 are in a vertical plane. Horizontal operation of the 5W4-GT/G permitted if pins 2 and 8 are in a horizontal plane.

• For choke not less than 6 henries.

* Approximate values.

AVERAGE PLATE CHARACTERISTIC

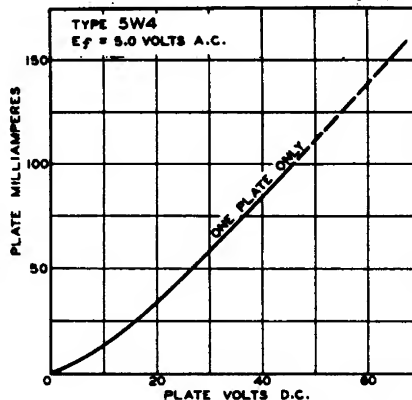

← Indicates a change.

92C-6008R1

Mar. 20, 1943

RCA VICTOR DIVISION
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY


DATA

5W4
5X4-G




5W4

OPERATION CHARACTERISTICS

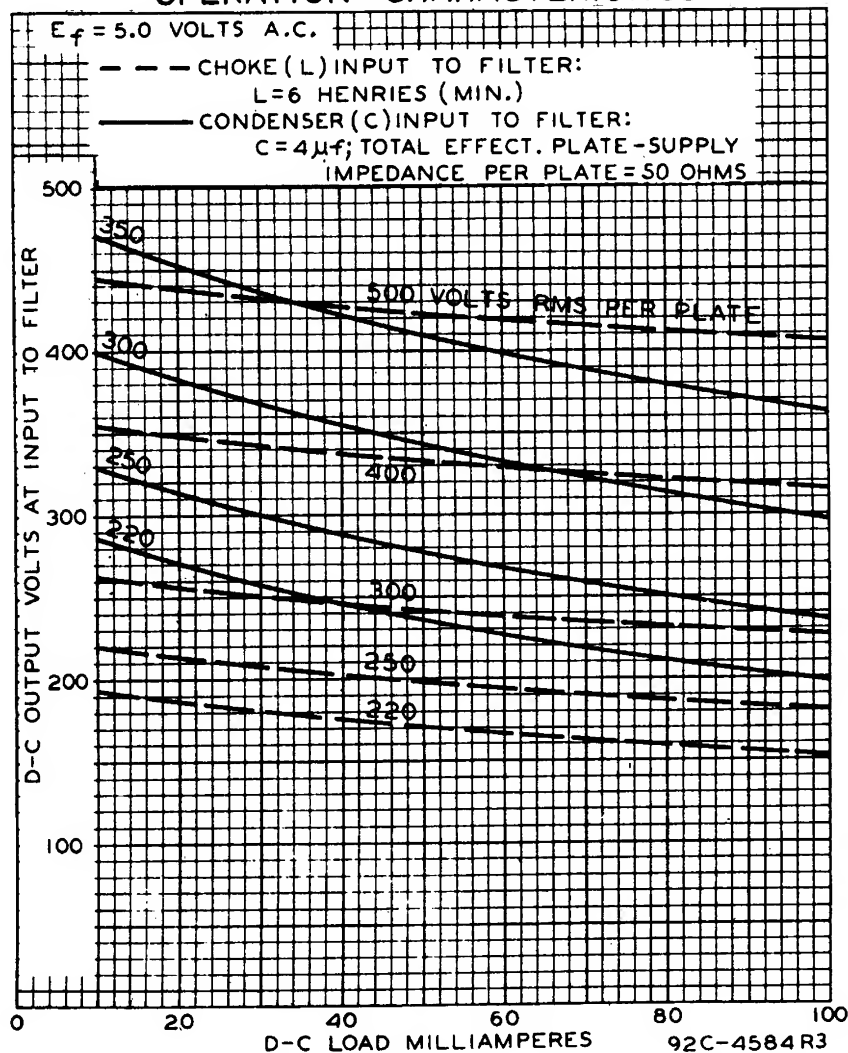

5X4-G

FULL-WAVE HIGH-VACUUM RECTIFIER

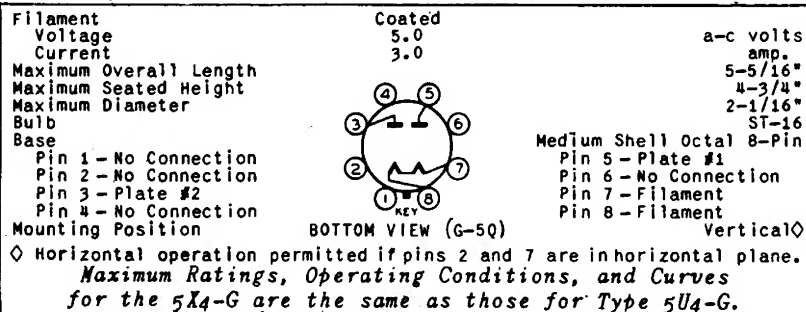

Mar. 20, 1943

RCA VICTOR DIVISION

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

DATA